

Recessed Mains Circular Downlights (Page 1)

cryselco.co.uk/dl



An attractive range of recessed mains downlights finished in white powdercoat. The polished aluminium reflector combined with the horizontal positioning of the single or twin fluorescent compact lamp (not included) gives excellent light distribution.

The range is designed for simple installation with a ceiling retention mechanism. The fittings can be supplied in various formats:

- PAR** - Open polished aluminium reflector.
- FAC** - Faceted open polished aluminium reflector.
- OFG** - Opal frosted recessed glass, IP 44 rated.
- DGC** - Dropped tempered glass cover with decorative chrome pins.
- LVR** - Polished aluminium six section fan louvre.
- ASYPAR** - Polished aluminium asymmetric version to give wall wash of light effect.


Emergency - Remote 3 hour maintained version available for the entire range. This is pre-wired to be mounted within 0.5m of the fitting.

| Open Polished Aluminium Reflector | | | | | | |
|-----------------------------------|----------------|-----|-----|-----|-----|--------|
| Cat. No. | Lamps Req. | A | B | C | D | Cutout |
| D1W/113/PAR | 1 x TC-DEL 13w | 285 | 100 | 195 | 300 | 175 |
| D1W/213/PAR | 2 x TC-DEL 13w | 285 | 100 | 195 | 300 | 175 |
| D1W/118/PAR | 1 x TC-DEL 18w | 285 | 100 | 195 | 300 | 175 |
| D1W/218/PAR | 2 x TC-DEL 18w | 285 | 100 | 195 | 300 | 175 |
| D1W/126/PAR | 1 x TC-DEL 26w | 325 | 125 | 225 | 340 | 205 |
| D1W/226/PAR | 2 x TC-DEL 26w | 325 | 125 | 225 | 340 | 205 |
| D1W/132/PAR | 1 x TC-TEL 32w | 325 | 125 | 225 | 340 | 205 |
| D1W/232/PAR | 2 x TC-TEL 32w | 325 | 125 | 225 | 340 | 205 |
| D1W/142/PAR | 1 x TC-TEL 42w | 325 | 125 | 225 | 340 | 205 |



| Open Faceted Polished Aluminium Reflector | | | | | | |
|---|----------------|-----|-----|-----|-----|--------|
| Cat. No. | Lamps Req. | A | B | C | D | Cutout |
| D2W/113/FAC | 1 x TC-DEL 13w | 285 | 100 | 195 | 300 | 175 |
| D2W/213/FAC | 2 x TC-DEL 13w | 285 | 100 | 195 | 300 | 175 |
| D2W/118/FAC | 1 x TC-DEL 18w | 285 | 100 | 195 | 300 | 175 |
| D2W/218/FAC | 2 x TC-DEL 18w | 285 | 100 | 195 | 300 | 175 |
| D2W/126/FAC | 1 x TC-DEL 26w | 325 | 125 | 225 | 340 | 205 |
| D2W/226/FAC | 2 x TC-DEL 26w | 325 | 125 | 225 | 340 | 205 |
| D2W/132/FAC | 1 x TC-TEL 32w | 325 | 125 | 225 | 340 | 205 |
| D2W/232/FAC | 2 x TC-TEL 32w | 325 | 125 | 225 | 340 | 205 |
| D2W/142/FAC | 1 x TC-TEL 42w | 325 | 125 | 225 | 340 | 205 |

| Polished Aluminium Asymmetric | | | | | | |
|-------------------------------|----------------|-----|-----|-----|-----|--------|
| Cat. No. | Lamps Req. | A | B | C | D | Cutout |
| D1W/213/HF/ASYPAR | 2 x TC-DEL 13w | 325 | 161 | 230 | 359 | 205 |

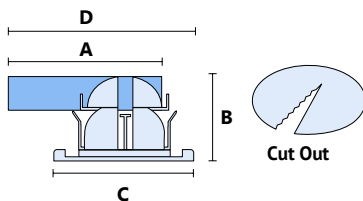

Control Gear options

Digital SwitchDIM dimming, Analogue 1 to 10 volt dimming, DSI and DALI, Emergency Conversion

Please Note

TC-DEL lamps for 13w, 18w and 26w High Frequency and emergency. TC-TEL lamps for 32w and 42w. 2 x 18w Digital Dimming requires a remote box to house the gear.


Recessed Mains Circular Downlights (Page 2)

cryselco.co.uk/dl



Opal Frosted Recessed Glass IP44

| Cat. No. | Lamps Req. | A | B | C | D | Cutout |
|-------------|----------------|-----|-----|-----|-----|--------|
| D3W/113/OFG | 1 x TC-DEL 13w | 285 | 100 | 195 | 300 | 175 |
| D3W/213/OFG | 2 x TC-DEL 13w | 285 | 100 | 195 | 300 | 175 |
| D3W/118/OFG | 1 x TC-DEL 18w | 285 | 100 | 195 | 300 | 175 |
| D3W/218/OFG | 2 x TC-DEL 18w | 285 | 100 | 195 | 300 | 175 |
| D3W/126/OFG | 1 x TC-DEL 26w | 325 | 125 | 230 | 345 | 205 |
| D3W/226/OFG | 2 x TC-DEL 26w | 325 | 125 | 230 | 345 | 205 |

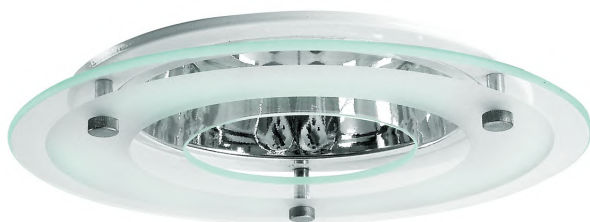

Dropped Glass Cover with Decorative Chrome Pins**

| Cat. No. | Lamps Req. | A | B | C | D | Cutout |
|-------------|----------------|-----|-----|-----|-----|--------|
| D4W/113/DGC | 1 x TC-DEL 13w | 285 | 100 | 195 | 300 | 175 |
| D4W/213/DGC | 2 x TC-DEL 13w | 285 | 100 | 195 | 300 | 175 |
| D4W/118/DGC | 1 x TC-DEL 18w | 285 | 100 | 195 | 300 | 175 |
| D4W/218/DGC | 2 x TC-DEL 18w | 285 | 100 | 195 | 300 | 175 |
| D4W/126/DGC | 1 x TC-DEL 26w | 325 | 130 | 225 | 340 | 205 |
| D4W/226/DGC | 2 x TC-DEL 26w | 325 | 130 | 225 | 340 | 205 |
| D4W/132/DGC | 1 x TC-TEL 32w | 325 | 125 | 225 | 340 | 205 |
| D4W/232/DGC | 2 x TC-TEL 32w | 325 | 125 | 225 | 340 | 205 |
| D4W/142/DGC | 1 x TC-TEL 42w | 325 | 125 | 225 | 340 | 205 |

**Diameter of Dropped Glass Cover is 242mm for 1 x 18w and 2 x 18w and 276mm for 1 x 26w and 2 x 26w. The drop of the glass cover is 19mm.

Polished Aluminium Six Section Fan Louvre

| Cat. No. | Lamps Req. | A | B | C | D | Cutout |
|-------------|----------------|-----|-----|-----|-----|--------|
| D5W/113/LVR | 1 x TC-DEL 13w | 285 | 120 | 195 | 300 | 175 |
| D5W/213/LVR | 2 x TC-DEL 13w | 285 | 120 | 195 | 300 | 175 |
| D5W/118/LVR | 1 x TC-DEL 18w | 285 | 120 | 195 | 300 | 175 |
| D5W/218/LVR | 2 x TC-DEL 18w | 285 | 120 | 195 | 300 | 175 |
| D5W/126/LVR | 1 x TC-DEL 26w | 325 | 145 | 230 | 345 | 205 |
| D5W/226/LVR | 2 x TC-DEL 26w | 325 | 145 | 230 | 345 | 205 |

