

Surface/Suspended Star T5

cryselco.co.uk/sta



A very versatile fitting that can be offered in surface or suspended format. The suspended version has the choice of direct or direct/indirect light output. Both single and twin lamp versions are available.



The body colour is offered in RAL 9006 (white aluminium) as standard with a satin (semi specular) aluminium louvre. Different coloured bodies, specular aluminium louvres and linkable versions are available to special order - please enquire.

Please note that as this range can be either surface mounted or suspended, the 2 wire suspension sets need to be ordered separately if the fitting is to be suspended. Please refer all 80w enquiries.

Emergency - Three hour maintained integral emergency conversion available for most of the range - please enquire.



Direct Light Only Suspend or Surface Mount					
Cat. No.	Lamps Req	A	B	C	Fixing Points
STA 128/DIR	1 x 28w T5	118	1206	58	1105
STA 154/DIR	1 x 54w T5	118	1206	58	1105
STA 135/DIR	1 x 35w T5	118	1506	58	1405
STA 149/DIR	1 x 49w T5	118	1506	58	1405
STA 228/DIR	2 x 28w T5	118	1206	58	1105
STA 254/DIR	2 x 54w T5	118	1206	58	1105
STA 235/DIR	2 x 35w T5	118	1506	58	1405
STA 249/DIR	2 x 49w T5	118	1506	58	1405
STA / SUS 2	Suspension set 2 wire 1.35m				

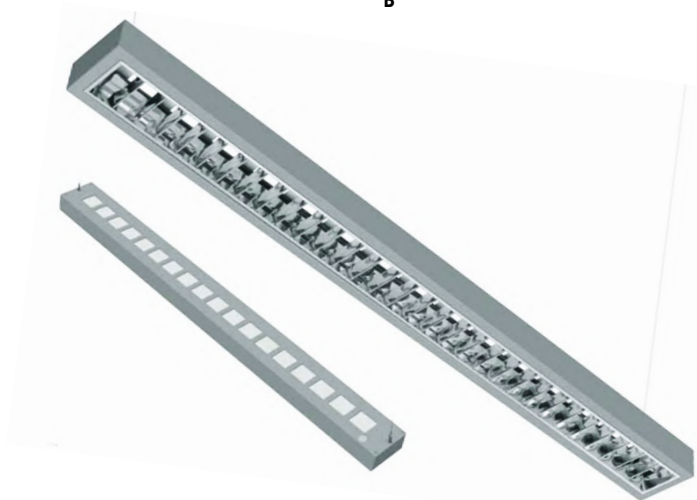

Direct and Indirect Light for Suspension Only					
Cat. No.	Lamps Req	A	B	C	Fixing Points
STA 128/DIR-IND	1 x 28w T5	118	1206	58	1105
STA 154/DIR-IND	1 x 54w T5	118	1206	58	1105
STA 135/DIR-IND	1 x 35w T5	118	1506	58	1405
STA 149/DIR-IND	1 x 49w T5	118	1506	58	1405
STA 228/DIR-IND	2 x 28w T5	118	1206	58	1105
STA 254/DIR-IND	2 x 54w T5	118	1206	58	1105
STA 235/DIR-IND	2 x 35w T5	118	1506	58	1405
STA 249/DIR-IND	2 x 49w T5	118	1506	58	1405
STA / SUS 2	Suspension set 2 wire 1.35m				

Linkable versions available on request



Control Gear options
 Digital SwitchDIM dimming, Analogue 1 to 10 volt dimming, DSI and DALI, Emergency Conversion