

Surface STM T5

cryselco.co.uk/stm



A luminaire for surface mounting complete with clear prismatic diffuser.

Wired with electronic high frequency gear for T5 lamps. Body is manufactured in white powder coated steel. The diffuser is made of extruded styrene (UV stabilised).


To allow easy replacement of the tubes the polystyrene end caps are fastened by a spring.

This luminaire offers an alternative to a batten T5 with diffuser and complements our T5 range offering a more conventional look.

Please refer all 80w enquiries.

Emergency - Three hour maintained integral emergency conversion available, but some single lamp versions may have to be housed in a twin (150mm wide body) with a centrally mounted tube.

Bodies with Prismatic Diffusers					
Cat. No.	Lamps Req	A	B	C	F/C
STM 128 T5	1 x 28w T5	70	1255	70	1040
STM 135 T5	1 x 35w T5	70	1535	70	1320
STM 149 T5	1 x 49w T5	70	1535	70	1320
STM 228 T5	2 x 28w T5	150	1255	70	1040
STM 235 T5	2 x 35w T5	150	1535	70	1340
STM 249 T5	2 x 49w T5	150	1535	70	1340

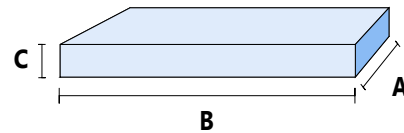

Control Gear options

Digital SwitchDIM dimming, Analogue 1 to 10 volt dimming, DSI and DALI, Emergency Conversion

